


2017 S041




蓝牙耳机用户手册 CH

产品描述

蓝牙版本：V5.0
 电池类型：可充电聚合物锂电池
 额定电压：3.7 V
 外接电压：DC4.8-5.5 V
 支持协议：Headset / Handsfree / A2DP / AVRCP
 产品标配：Micro USB充电线、产品使用手册

- 该款蓝牙耳机能接收来自手机、笔记本电脑及其他蓝牙设备的音频。
- 与PC蓝牙DONGLE配对连接后：可以播放电脑的各种音频文件。

产品示意图

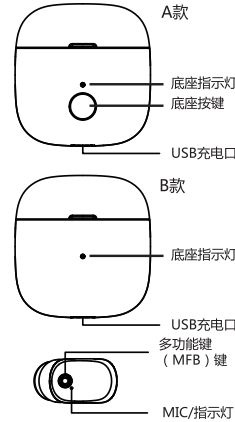

功能介绍

开机：在关机状态下，长按MFB键3秒，蓝灯闪3次,设备开启。
配对：在关机状态下，长按MFB键5秒，红蓝灯交替闪烁，设备配对中。
关机：在开机状态下，长按MFB键4秒，红色指示灯亮约1秒后熄灭，设备关闭。
配对完成（耳机与手机建立连接）：在配对状态下，在手机主屏幕上点击搜索到的耳机配对名，语音提示已连接，蓝灯熄灭。
取消配对（耳机与手机断开连接）：连接状态下，关闭手机蓝牙或蓝牙耳机超出距离断开连接，10秒蓝灯闪1下。
自动回连：1\在连接范围内，开机后，自动连接已配对过的蓝牙设备,2\在待机未连接状态下，短按一下主设备MFB键链接已配对过的手机,3\在通话\去电\来电\待机\听音乐期间,远离设备(3分钟时间内)，回到可连接范围，即可自动连接。
末码重拨：连机待机和听歌状态下，双击MFB键。
接听电话：来电状态下，短按MFB键一下。
挂断电话：通话中或去电中，短按MFB键一下。
拒接来电：来电状态下，长按MFB键2秒。
三方通话：1/在通话中有第二个来电，单击MFB键挂断当前通话,接听第二个来电；双击MFB键接听第二个来电，保留第一个电话；
 2/在三方通话时，双击MFB键在第一个和第二个电话之间相互切换。

功能介绍

中英文语音切换：配对模式下，双击MFB键，中英文提示语音切换。
播放/暂停：待机或播放中，短按MFB键。
复位功能：非连接待机状态，双击MFB键，清除所有配对信息，耳机关机。
IOS电量显示：使用苹果手机连接上蓝牙，在手机通知栏蓝牙图标旁有电量指示条显示耳机电量。
低电报警：在电池电压低于3.3V时，会有电量低的提示音。
低电关机：各种开机状态中，当电池电压低到3V时耳机将自动关机。
充电：1. 机头放入充电底座内会自动检测充电，充电时耳机复位，耳机红灯常亮；2. 底座插5V电源充电时，底座红灯常亮。
充电饱和：1. 机头充电饱和和蓝灯亮约50秒后熄灭；2.底座充电饱和和红灯熄灭，不亮灯。
底座放电：按BTN键，短按BTN键1秒，处于底座中的耳机充电。(注意：A款具有该功能，B款不具有该功能。)
耳机充电中：机头指示灯(红灯)长亮
耳机充电电：机头指示灯(红灯)熄灭
底座充电电：中间底座指示灯(红灯)长亮
底座充电电：中间底座指示灯(红灯)熄灭
底座未充电：中间底座指示灯(红灯)熄灭
耳机充电电：机头指示灯(红灯)长亮
耳机充电电：机头指示灯(蓝灯)长亮约50秒熄灭

功能介绍

蓝牙首次配对
 ·蓝牙耳机首次配对时，请将蓝牙耳机和手机的距离控制在1米范围内；
 ·关机状态下长按多功能键直到红蓝灯交替闪烁再松开；
 ·手机设置为查找蓝牙设备状态；
 ·当手机找到蓝牙耳机后，在手机列表中选择确认；
 ·按照手机说明书，打开“蓝牙搜索”或“添加新设备”选择“Bluetooth 6p”，确认后按手机的提示输入密码“0000”后确认；
 ·配对失败后，请重复上述操作；
 ·如果配对成功后，蓝灯熄灭。


LED-操作指示：

底座充电电	中间底座指示灯(红灯)长亮
底座充电电	中间底座指示灯(红灯)灯灭
底座未充电	中间底座指示灯(红灯)熄灭
耳机充电中	机头指示灯(红灯)长亮
耳机充电电	机头指示灯(蓝灯)长亮约50秒熄灭

产品型号	经销商名称	产品序列号	联系电话	销售日期	用户地址	通讯地址	E-mail							
								经销商信息						
								用户信息						
								备注						

主机一年内的免费保修,若人为损坏,作收费维修处理

2017 S041





Bluetooth Headset User Manual EN

Product Description

Bluetooth standard : V5.0
 Battery Type: Rechargeable lithium polymer battery
 Rated Voltage: 3.7V
 External Voltage: DC4.8-5.5V
 Support protocol : Headset / Handsfree / A2DP / AVRCP
 Accessories : Micro USB charging cable. User manual

- This product can accept audio file from any Bluetooth devices like Bluetooth mobile phones, Bluetooth notebooks.
- When connect to Bluetooth DONGLE on PC, it can play any audio files on the computer.

Product Schematic

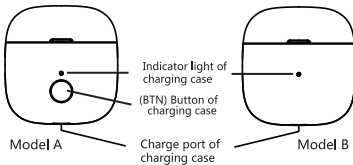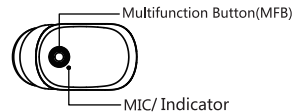

Features

Power On: long press the button of MFB for 3 seconds until the blue light flash 3 times, the device will be on.
Pairing Method: Long press the button of MFB for 5 seconds while in the power-off status, the blue and red light will flash in turn showing the pairing status.
Power Off: Long press the button of MFB for 4 seconds while in the power-on status, the red light will flash about 1 second and go off to show that the device has been off.
Call hang up: short press the button of MFB while in talking or calling status
Last number redial: double click the button of MFB while in standby and music playing status
Call answer: short press the button of MFB
Call reject: long press MFB button for 2 seconds

Pairing finished: (the earphone paired to mobile before) Turn the earphone on, please search and press the button the model name of earphone on your mobile, there will be a voice prompt remind you that connection has been finished, and then blue light will be auto turn off.
Pairing canceled status: (the earphone and mobile not connected),turn off the Bluetooth function on mobile or beyond the range of connection ,the blue light will flash 1 time 10 seconds.
Automatic connection: within the range of connection, the mobile will automatic connected to the Bluetooth device which has been paired before while on status short press the button of MFB on the main device to connect the mobile which has been paired before while standby status but without connection.Away from the device while talking/calling/incoming call/standby mode/listening music and back to the range of connection within 3 min, will automatic connect to your mobile.
Answer the second call and hang up the first call: click the MFB button for 1time to answer incoming call while calling.
Answer the second call and remain the first call: double click MFB button to answer the incoming call while in calling status, switchover between two calls also workable.
Low-battery warning: voice prompt to remind the low battery while the power of battery lower than 3.3V.

Low-battery and turn off: the earphone will automatic turn off when the voltage of battery lower than 3V while on status.
Charging: 1. Put set in station, will charging automatically, also reset while charging, red light on, 2. Station connecting 5V power, station red light on.
Charged: 1. Blue light off after light on 50 seconds; 2. Red light of station off.
Play/pause: short press MFB button while standby or music playing status.
Reset function: double click MFB button to clean all pairing info while standby status(without connection), the earphone turned off.
Power display on IOS system: connect to the Bluetooth headset with your apple mobile, there will have power display beside the mark of Bluetooth on the mobile notification bar.
Switching Language: switch prompt language between Chinese and English, just double click MFB button when device connected.
Discharge the base: Press the BTN button for 1 second to charge the headphones in the base.
 (Note: A has this feature, and B does not.)
Powered off: Press the BTN button for 3 seconds. Headphones in the base do not charge.
 (Note: A has this feature, and B does not.)

Steps of bluetooth pairing-and first pairing
 ·keep bluetooth headset and your phone within 1 meter when pairing.
 ·long press the MFB button until the red and blue indicators flash alternately when power is off.
 ·Set the phone to search for bluetooth device.
 ·When phone finds headset,select “Bluetooth 6p” from list.
 ·Enter pin code “0000” when prompted by phone.
 ·Repeat above steps if the pairing failed.
 ·Blue light will be turn off when pairing is done.

LED-operation indication:

Station Charging:	Middle red light on
Station Charged:	Middle red light off
Station not charging:	Middle red light off
Headphone charging:	red light on
Headphone charged:	blue light on 50 seconds then off

Item	Dealer name	Product series number	Telephone number	Date of sales	User address	Contact address	E-mail							
								WARANTY CARD						
								Dealer information						
								User information						
Remark														

The Headphone has one year free warranty service from the date of purchase, for any deliberate damage should charge warranty fee